

UPDATE PROCEDURE

BRIGHTER X-DOT WASH IP

Along with the instructions below, you should receive a package with the update programme and three files with firmware for the device.


1. After unpacking, install the driver from the file "windowsdesktop-runtime-6.0.14-winx86" file.
2. Run the update tool.
3. Use a twisted pair cable to connect your computer to the device (the device must be turned on). Use the **Searching for devices** option to check whether the programme is communicating with the device (it is possible to update several devices at the same time). Then, using the **Upload files** option, select one of the three files to upload (in order from last to first):

1.X-DOT_DIS_7.4

2.X-DOT_RGBL_2.6

3.X-DOT_MOTOR_3.0

4. Then, using the Start updating option, start uploading the software (the device display will flash rapidly during uploading). Once the upload is complete and the device has reset, repeat the steps with the remaining two files.

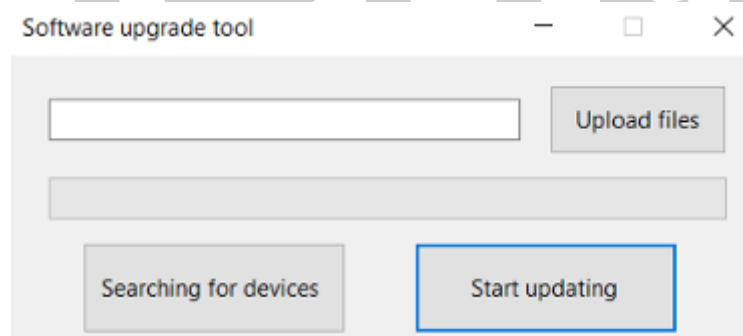

5. To check that the update is correct, click the **DOWN** button on the display three times and read the software versions. After the software has been installed correctly, the following characters should appear:

SYSTEM OK!

Brighter X-DOT

IC1: V7.4A

IC2: V3.0B

IC3: V2.6C

6. **Update complete**